

THE ALL NEW
NEXT
GENERATION
AIR CONDITIONERS

AMSTRAD

KHUSHIYON KI SHURUAT

2024

AIR CONDITIONERS RANGE

**GOLD
POWER**



*Dimaag
Use Karo*

*Amstrad
Choose Karo*



THE ALL NEW
NEXT
GENERATION
AIR CONDITIONERS

CUSTOM - BUILT AIR CONDITIONERS



Based on Consumer Insight, we at Amstrad understand that every person has a different need from the air conditioner depending on the region where he/she lives (humidity, temperature and air pollution). Hence, one specification of air conditioner cannot be ideal choice.

For the first time in India, Amstrad has introduced reliable, high quality air conditioners for specific needs and regions. Amstrad offers a wide range of air conditioners from Dr. Ac 2.0 to Silencio AC. From All Season to Smart wi-fi to Energy Saving. Our all new next generation air conditioners are custom built to ensure faster cooling, minimize energy consumption and ensure healthy air. The All Season range provides cooling in summer, humidification in the rainy season and heating in winters.

Amstrad is Inspired by Passion for Perfection to deliver Next Generation – Quality, Service & Technology






AMSi1353
AMSi2053



MEGAL Series

The "Megalo" air conditioner is equipped with an Energy Efficient Inverter Compressor and a Dehumidifying Mode, making it a smart choice for your home. This air conditioner saves energy while also improving air quality through its efficient cooling and moisture removal capabilities.

Experience cost-saving comfort with the "Megalo" air conditioner.



WI-FI

The AC can be controlled from anywhere through your smartphone.



KEY FEATURES

NANO
COATING ON
EVAPORATOR



**JOG
SHUTTLE
REMOTE**



**100%
COPPER**

MAXIMUM COOLING CAPACITY
1 TON: **3800W**
1.5 TON: **5800W**



AMS133DrCMiC
AMS203DrCMiC




DrAC 2.0

Next Generation Pentasane Filtration Technology.



“The Dr. AC comes with inbuilt Air Purifier and Air Steriliser. Keeps the mosquitoes away too.”



PENTASANE FILTRATION TECHNOLOGY

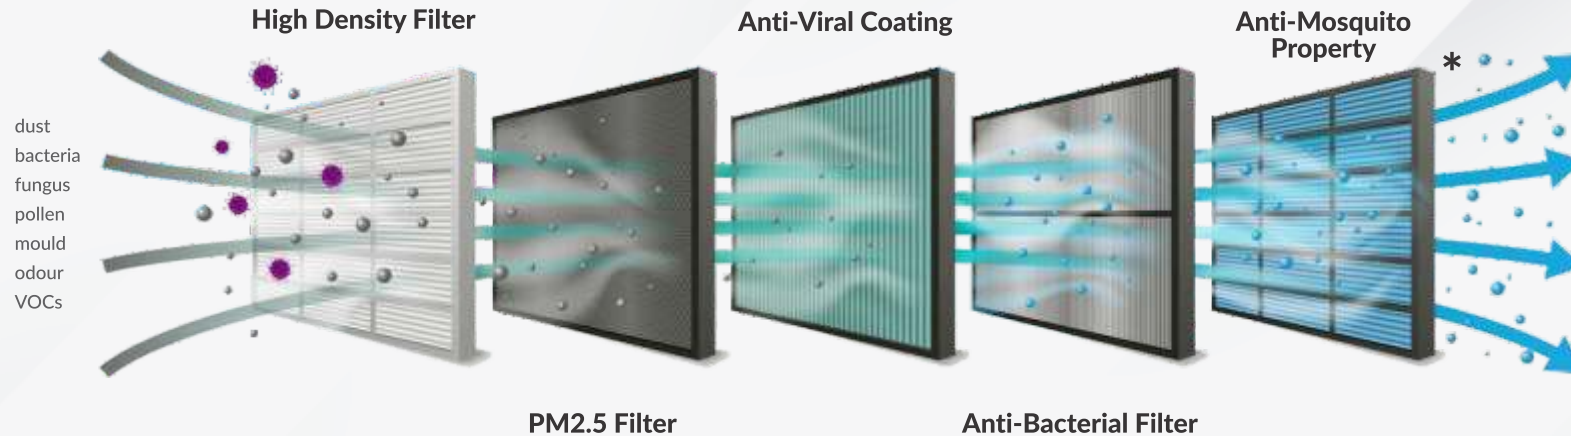

KEY FEATURES








AMSi1332
AMSi2032



Perfecto

Powerful, feature-rich AC, ideal cooling and unbeatable value



OPERATIONAL EVEN AT 56°C AMBIENT

Ensures even cooling at 56°C,
enhancing comfort with versatile all-round air distribution in extreme conditions




KEY FEATURES



SELF 
DIAGNOSIS

100%
COPPER

MAXIMUM COOLING CAPACITY

1 TON: **3800W**
1.5 TON: **5700W**



SILENCIO
silent one



AM133SAIHC
AM203SAIHC


Hot & Cold Series

Amstrad Silencio Hot & Cold Air Conditioners deliver comfortable air temperature throughout summers & winters. It also acts as a dehumidifier during the rainy season.

“Experience the cool of Kashmir in summers and the warmth of Chennai in Winters.”



SUPER QUIET
22~24 dB*



LIGHT SLEEP TECHNOLOGY
FOR A COMFORTABLE SLEEP

-15°C TO 52°C COMFORTABLE RUNNING

With the leading two-stage compression (EVI) and cooling system optimization technology and high reliable unit components to ensure the reliable operation even in extreme ambient temperature (heating at -15°C, cooling at 52°C).



KEY FEATURES

TESTED FOR
52°C
AMBIENT TEMPERATURE

GOLD FIN
INDOOR UNIT

HYDROPHILIC
CONDENSER

MAXIMUM COOLING CAPACITY
1 TON: **3716W**
1.5 TON: **5700W**


STABILIZER
FREE
OPERATION



AMS13S3DiC
AMS20S3DiC



The "Trio Air Suction" air conditioner is designed to provide faster cooling for your home. Its innovative air suction technology allows it to cool the room faster, giving you instant relief from the heat. With its efficient cooling performance, the "Trio Air Suction" air conditioner is the perfect solution for anyone seeking quick and effective relief from the heat.



NEW INVERTER SYSTEM

The inverter technology helps the compressor operate as per your room temperature.



1Hz Operation

+



0.1°C Temperature Control

+



0.3 W Stand by

KEY FEATURES

TESTED FOR
56°C
AMBIENT TEMPERATURE

NANO
COATING ON
EVAPORATOR

STABILIZER
FREE
OPERATION

100%
COPPER

MAXIMUM COOLING CAPACITY
1 TON: **3800W**
1.5 TON: **5800W**






AMS20Gi3C
AMS25Gi3C



global series

The Global Series air conditioner provides comfortable indoor climate while reducing energy consumption and operating costs. This series features an energy efficient Rotary Compressor, which operates smoothly and quietly while consuming less power.

The Dehumidifying Mode allows for removal of excess moisture from the air, resulting in a more comfortable indoor environment.






AMSi1231
AMSi1831



OPTIMA

Optimum performance with great quality for a cool and comfortable environment.




TESTED FOR
56°C
AMBIENT TEMPERATURE



MAXIMUM COOLING CAPACITY
1 TON: **3700W**
1.5 TON: **5450W**



AMSi2141100HD
AMSi2631100HD
AMSF2131100SHD
AMSF2621100SHD

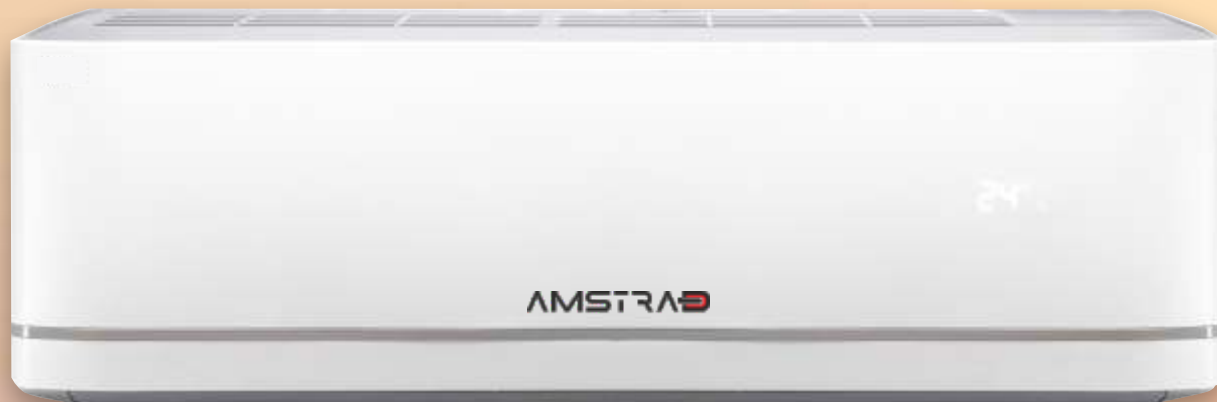

←----- 1.1 Mtr -----→

The Real
HEAVY DUTY AC

Heavy Duty Air Conditioners

Enjoy consistent cool airflow even in extreme hot weather, while saving big on your power bills. Here's Heavy-Duty cooling that's specially designed with 1.1 metre IDU for longer reach across the room.



HIGH CAPACITY MACHINE

POWERFUL COOLING

4WAY SWING

TESTED FOR
56°C
AMBIENT TEMPERATURE

LONG REACH AIRFLOW

100% COPPER

SELF DIAGNOSIS

AUTO RESTART

SLEEP MODE

DRY STATE



AMSF1334
AMSF2034




AMSF2524



Fixed Speed AC

A combination of great cooling and energy saving to give you a comfortable experience.





AMWi1935
AMWi1955



AMWF1936



Window AC

Amstrad Window ACs come with a promise of superior performance, elegant design and ensure energy savings.



**100%
COPPER**



**FILTER
DIRTY
ALARM**




**TURBO
COOLING**



**AUTO
RESTART**

**SLEEP
MODE**

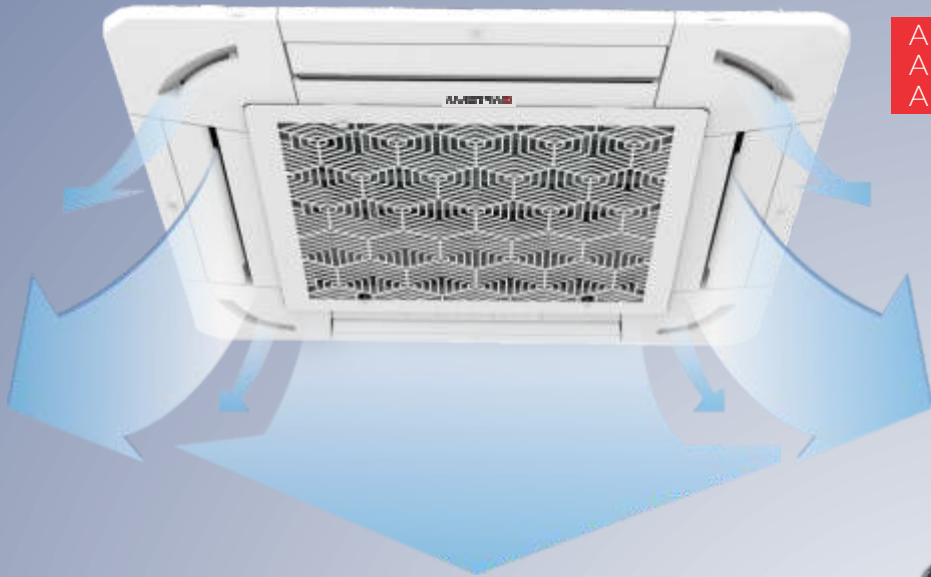

AMSC24iA
AMSC36iA
AMSC48iA

Cassette AC

Surround cooling enabled by 360° directional wind (provided by 8 vents) can deliver air evenly throughout every corner in any space.



360°
Airflow

INDEPENDENT VENT CONTROL




HYDROPHILLIC ALUMINIUM FIN

SELF DIAGNOSIS



TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS

MODEL NAMES		AMSi1231 / AMSi1231C	AMSi1332	AMSi133DrCMiC	AM133SAiHC	AMS13S3DiC	AMSi1353
Type of AC		Inverter	Inverter	Inverter - Smart	Inverter	Inverter - Smart	Inverter - Smart
		Cooling Only	Cooling Only	Cooling Only	Hot & Cold	Cooling Only	Cooling Only
Capacity	Ton	1.0T	1.0T	1.0T	1.0T	1.0T	1.0T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Rated Cooling Capacity (100%/50%)	W	3300 / 1650	3450 / 1725	3450 / 1725	3450 / 1725	3450 / 1725	3480 / 1740
Input Power (100%/50%)	W	995 / 425	1090 / 421	1090 / 421	1010 / 390	1090 / 421	835 / 325
Maximum Cooling Capacity	W	3700	3800	3716	3716	3800	3800
Annual Power Consumption	Kw/h	660.83	684.79	684.79	634.44	684.79	526.8
ISEER (Cooling)	W/W	3.87	3.90	3.90	4.21	3.90	5.11
Star Rating		3	3	3	3	3	5
Rated Current	A	4.20	4.85	4.85	4.50	4.85	4.10
INDOOR UNIT							
Net Dimensions (L x W x H)	mm	844 x 270 x 210	844 x 270 x 210	844 x 270 x 210	805 x 270 x 200	875 x 270 x 212	844 x 270 x 210
Packing Dimensions (L x W x H)	mm	936 x 340 x 290	936 x 340 x 290	936 x 340 x 290	865 x 340 x 270	936 x 345 x 300	936 x 340 x 290
Weight (Net) / (Gross)	Kg	8.8 / 11.6	8.7 / 11.4	8.7 / 11.4	8.4 / 10.0	8.9 / 11.7	9.0 / 12.0
Air Flow Volume	m ³ /h	700	750	750	630	750	750
Operating Noise Level	dB(A)	40	40	40	40	40	40
OUT DOOR UNIT							
Size	in	18	20	20	20	20	20 (Wide)
Refrigerant	Type/ Gms	R32	R32	R32	R32	R32	R32
Net Dimensions (L x W x H)	mm	840 x 300 x 560	840 x 300 x 560	840 X 300 X 560	780 x 270 x 560	840 x 300 x 560	840 x 360 x 560
Packing Dimensions	mm	910 x 345 x 600	910 x 345 x 600	910 X 345 X 600	900 x 360 x 615	910 x 345 x 600	910 x 405 x 600
Weight (Net)/(Gross)	Kg	22.0 / 25.8	22.0 / 25.8	22.0 / 25.8	24.8 / 27.8	22.0 / 25.8	26.2 / 30.5
Operating Noise Level	dB(A)	52	52	52	52	52	52
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	3/8" (9.52mm)	3/8" (9.52mm)	3/8" (9.52mm)	3/8" (9.52mm)	3/8" (9.52mm)	1/2" (12.7mm)

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS

MODEL NAMES		AMSi1831	AMSi2032	AMS203DrCMiC	AM203SAiHC	AMS20S3DiC	AMS20Gi3C	AMSi2053	AMS25Gi3C
Type of AC		Inverter	Inverter	Inverter-Smart	Inverter	Inverter-Smart	Inverter	Inverter-Smart	Inverter
		Cooling Only	Cooling Only	Cooling Only	Hot & Cold	Cooling Only	Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1.5T	1.5T	1.5T	1.5T	1.5T	1.5T	1.5T	2.0T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Rated Cooling Capacity (100%/50%)	W	4850 / 2425	5100 / 2550	5100 / 2550	5130 / 2565	5100 / 2550	5100 / 2550	5150 / 2575	6350 / 3175
Input Power (100% / 50%)	W	1560 / 580	1600 / 625	1600 / 625	1810 / 580	1600 / 625	1600 / 625	1285 / 452	2070 / 770
Maximum Cooling Capacity	W	5450	5700	5700	5700	5800	5700	5800	6839
Annual Power Consumption	Kw/h	959.90	1011.43	1011.43	1028.43	1011.43	1011.43	767.34	1274.05
ISEER (Cooling)	W/W	3.91	3.90	3.90	3.86	3.90	3.90	5.20	3.86
Star Rating		3	3	3	3	3	3	5	3
Rated Current	A	6.85	7.25	7.25	8.20	7.25	7.25	5.70	9.34
INDOOR UNIT									
Net Dimensions (L x W x H)	mm	844 x 270 x 210	945 x 315 x 240	945 x 315 x 240	910 x 295 x 220	980 x 315 x 233	910 x 315 x 240	945 x 315 x 240	910 x 315 x 240
Packing Dimensions (L x W x H)	mm	936 x 340 x 290	1040 x 380 x 315	1040 x 380 x 315	980 x 350 x 290	1060 x 380 x 317	980 x 380 x 315	1040 x 380 x 315	980 x 380 x 315
Weight (Net) / (Gross)	Kg	9.0 / 12	11.0 / 14.3	11.0 / 14.3	10.3 / 12.3	11.2 / 14.5	11.0 / 14.0	11.3 / 14.5	11.2 / 14.0
Air Flow Volume	m ³ /h	800	1100	1100	950	1100	1100	1100	1150
Operating Noise Level	dB(A)	42	42	42	41	42	42	42	44
OUT DOOR UNIT									
Size	in	20	20	20	20	20	20	20 (Wide)	22
Refrigerant	Type/ Gms	R32	R32	R32	R32	R32	R32	R32	R32
Net Dimensions (L x W x H)	mm	840 x 300 x 560	840 X 300 X 560	840 X 300 X 560	780 x 270 x 560	840 x 300 x 560	840 x 300 x 560	840 x 360 x 560	860 x 335 x 595
Packing Dimensions	mm	910 x 345 x 600	910 X 345 X 600	910 X 345 X 600	900 x 360 x 615	910 x 405 x 600	910 x 345 x 600	885 x 417 x 615	930 x 405 x 660
Weight (Net) / (Gross)	Kg	23.5 / 27.8	23.5 / 27.8	23.5 / 27.8	27.4 / 31.07	23.5 / 27.8	23.5 / 27.8	27.2 / 31.5	29.0 / 33.5
Operating Noise Level	dB(A)	54	54	54	54	54	54	54	58
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF FIXED SPEED SPLIT AIR CONDITIONERS

MODEL NAMES		AMSF1334	AMSF2034	AMSF2524
Type of AC		Fixed Speed	Fixed Speed	Fixed Speed
		Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1.0 T	1.5 T	2.0 T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Rated Cooling Capacity	W	3420	5150	6250
Input Power	W	886	1335	1750
Max Cooling Capacity	W	3683	5547	6731
Annual Power Consumption	Kw/h	685.86	1033.43	1354.69
ISEER (Cooling)	W/W	3.86	3.86	3.57
Star Rating		3	3	2
Rated Current	A	4.00	5.95	7.80
INDOOR UNIT				
Net Dimensions (L x W x H)	mm	820 x 270 x 210	910 x 315 x 240	910 x 315 x 240
Packing Dimensions (L x W x H)	mm	885 x 340 x 291	980 x 380 x 315	980 x 380 x 315
Weight (Net) / (Gross)	Kg	8.6 / 11.4	11.2 / 14.0	11.2 / 14.0
Air Flow Volume	m ³ /h	750	1100	1150
Operating Noise Level	dB(A)	40	42	44
OUT DOOR UNIT				
Size	in	20	22	22
Refrigerant	Type/ Gms	R32	R32	R32
Net Dimensions (L x W x H)	mm	840 x 300 x 560	860 x 335 x 595	860 x 335 x 595
Packing Dimensions (L x W x H)	mm	910 x 345 x 600	930 x 405 x 660	930 x 405 x 660
Weight (Net)/(Gross)	Kg	28.5 / 33.0	35.6 / 40.1	37.5 / 41.5
Operating Noise Level	dB(A)	52	56	58
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	1/2" (12.7mm)	1/2" (12.7mm)	5/8" (15.8mm)

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 60 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF WINDOW AIR CONDITIONERS

MODEL NAMES			AMWi1935	AMWi1955	AMWF1936
Type of AC			Inverter	Inverter	Fixed Speed
Parameters	Capacity	Unit	Cooling Only	Cooling Only	Cooling Only
		Ton	1.5 T	1.5 T	1.5 T
Power Supply Source		V	230V/1 Ph/50 Hz	230V/1 Ph/50 Hz	230V/1 Ph/50 Hz
	Rated Cooling Capacity	W	4900 / 2450	5000 / 2500	4850
	Cooling Power Input	W	1770 / 790	1590 / 725	1534
	Max Cooling Capacity	W	5100	5200	-
	Rated Current	A	7.91	6.98	6.77
Refrigerant	Refrigerant	--	R32	R32	R32
	Refrigerant Charge	Gm	560	560	540
EER		W/W	3.15	3.53	3.16
Star Rating			3	5	3
Air Flow Volume	(H/M/L)	m ³ /h	800 / 750 / 700	750 / 700 / 650	800 / 750 / 700
Indoor Sound Level	(H/M/L)	dB (A)	56 / 54 / 52	56 / 54 / 52	58 / 55 / 53
Dimension of Unit	(L×W×H)	mm	656 x 670 x 428	656 x 670 x 428	660 x 735 x 430
Dimension of Carton Box	(L×W×H)	mm	760 x 760 x 528	760 x 760 x 528	740 x 825 x 540
Net Weight	Only Unit	kg	42	44	49.5
Gross Weight	With Packing	kg	47	49	56

TECHNICAL SPECIFICATIONS OF CASSETTE AC

Model Number			AMSC24iA	AMSC36iA	AMSC48iA
Type of AC			Inverter	Inverter	Inverter
Power Supply		Ph-V-Hz	230V,1Ph, 50HZ	230V,1Ph, 50HZ	230V,1Ph, 50HZ
Cooling (T1)	Capacity	Ton	1.8T	3.0T	4.0T
		Full Load / Half Load Capacity (W)	6200 / 3100	10600 / 5300	13200 / 6600
		Btu/h	21155 / 10578	36169 / 18084	45040 / 22520
		Max Cooling Capacity (W)	6712	11024	13550
	Input	Full Load / Half Load Power W	1745 / 615	3400 / 1370	4575 / 1775
	Rated Current	Full Load / Half Load (A)	8.2 / 5.0	16.0 / 8.0	22.0 / 12.0
	ISEER	W/W	4.60	3.75	3.55
	Star Rating		4	4	3
	e.Tube Outside Dia.and Type	mm	Φ7, Innergroove Tube	Φ7, Innergroove Tube	Φ7, Innergroove Tube
g.Number of Circuits		5-IN & 5-OUT (IDU), 2-IN & 1 OUT (ODU)	6-IN & 6-OUT (IDU), 4-IN & 1-OUT (ODU)	6-IN & 6-OUT (IDU), 4-IN & 1-OUT (ODU)	
Indoor Air Flow (Hi/Mi/Lo)		m3/h	1280 (High)	2180 (Turbo)	2180 (Turbo)
Sound Level (Sound Pressure)		dB(A)	45/43/41	52/50/48	52/50/48
Throttle Type			Outdoor (Throttle Valve)	Outdoor (Throttle Valve)	Outdoor (Throttle Valve)
Indoor Unit	Dimension (W*D*H)	mm	845x845x245	845 x 845 x 290	845 x 845 x 290
	Packing (W*D*H)	mm	950X950x328	950 x 950 x 373	950 x 950 x 373
	Dimension (WxDxH) (Panel)	mm	950x950x52	950x950x52	950x950x52
	Packing (WxDxH) (Panel)	mm	1010x1034x118	1010x1034x118	1010x1034x118
	Net/Gross Weight	Kg	24.0 / 30.5	26.0 / 32.0	26.0 / 32.0
	Net/Gross Weight (Panel)	kg	5.5/8.0	5.5/8.0	5.5/8.0
Outdoor Noise Level		dB(A)	58	60	65
Throttle Type			Outdoor (Throttle Valve)	Outdoor (Throttle Valve)	Outdoor (Throttle Valve)
Outdoor Unit	Dimension (W*D*H)	mm	781x281x555	850x310x684	1032x383x791
	Packing (W*D*H)	mm	925x395x605	1032x450x755	1090x470x933
	Net/Gross Weight	Kg	28.0 / 30.0	42.0 / 47.0	64.0 / 68.0
Refrigerant Type	Type		R32	R32	R32
	Charged Volume	Kg	0.9	1.36	1.72
Design Pressure		MPa	4.28 / 1.18	4.28 / 1.18	4.28 / 1.18
Drainage Water Pipe Diameter		mm	ODΦ26mm	ODΦ26mm	ODΦ26mm
Refrigerant Piping		Liquid Side/ Gas Side	6.35 mm (1/4in) / 15.88mm (5/8in)	9.52mm(3/8in) / 15.88mm(5/8in)	9.52 mm (3/8in) / 15.88mm (5/8in)
Controller			Remote Control	Remote Control	Remote Control
Operation Temperature		°C	48 Max	48 Max	48 Max
Room Temperature	Indoor (Cooling)	°C	16~30//	16~30//	16~30//

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONER

Model Name		AMSi2141100HD	AMSi2631100HD	AMSF2131100SHD	AMSF2621100SHD
Type of AC		Inverter	Inverter	Fixed Speed	Fixed Speed
		Cooling Only	Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1.5T	2.0T	1.5T	2.0T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Cooling Capacity (100%/50%)	W	5500 / 2750	7000 / 3500	5500	6400
Input Power (100%/50%)	W	1575 / 538	2190 / 805	1418	1798
Max Cooling Capacity	W	5924	7539	5500	6400
Annual Power Consumption	Kw/h	925.83	1339.23	1097.68	1391.84
ISEER (Cooling)	W/W	4.6	4.05	3.88	3.56
Star Rating		4	3	3	2
Rated Current	A	7.10 / 3.80	9.40 / 5.20	6.3	7.9
INDOOR UNIT					
Net Dimensions (LxWXH)	mm	1100 x 356 x 248	1100 x 356 x 248	1100 x 356 x 248	1100 x 356 x 248
Packing Dimensions (LxWXH)	mm	1171 x 430 x 322	1171 x 430 x 322	1171 x 430 x 322	1171 x 430 x 322
Weight (Net)/(Gross)	kg	15.0 / 19.4	15.0 / 19.4	15.0 / 19.4	15.0 / 19.4
Air Flow Volume	m3/h	1300	1350	1300	1350
Operating Noise Level	dB(A)	46	48	46	48
OUTDOOR UNIT					
Size	In	20" Wide	20" Wide	20" Wide	22"
Refrigerant	Type/ Gms	R32	R32	R32	R32
Net Dimensions (LxWXH)	mm	840 X 360 X 560	840 X 360 X 560	840 X 360 X 560	860 X 335 X 595
Packing Dimensions (LxWXH)	mm	910 X 405 X 600	910 X 405 X 600	910 X 405 X 600	930 X 405 X 660
Weight (Net)/(Gross)	kg	25.7 / 31.0	29.5 / 34.0	35.10 / 39.40	36.5 / 41.0
Operating Noise Level	dB(A)	56	58	58	58
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	1/2" (12.7mm)	5/8" (15.88mm)	1/2" (12.7mm)	5/8" (15.88mm)



AMSTRAD NEXT GENERATION SERVICE




Ways to raise a
Service Request

You can reach us 24x7
7 days a week



Download in Browser

1. Mobile App – app.amstradworld.com
2. Signup in the App with Name, Mobile Number and Address and create Password to Login.
3. Go to the Amstrad Product List and Raise a Service Request.
4. Customer can track the status of the Service Request via the App.

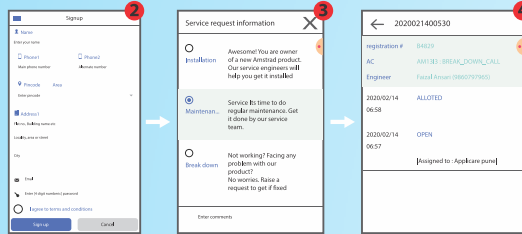

WhatsApp

WhatsApp us on **9175950079** anytime as per your convenience.



Website

Easily raise a service request from our website: www.amstradworld.com



Email

Kindly email us at : care@amstradworld.com



IVR

Stuck in 9 to 6 Job? No time to call Customer Care number?
Call Multi-Lingual IVR number **020 7197 0079**. 24x7 - 365 Days
Available in Hindi | English | Gujarati | Malayalam | Punjabi | Tamil | Kannada | Telugu | Bangla



Call on Customer Care number

You can call us on the Customer Care No.: **1860 266 7777**



AMSTRAD Guarantees Customer Delight

- ✓ **Checkpoint 1:** Upon registration of the AMSTRAD product, customer gets a WELCOME SMS.
- ✓ **Checkpoint 2:** After registering for a service request, customer gets an acknowledgment SMS with service request number.
- ✓ **Checkpoint 3:** Within 120 minutes of the service request a response call will be made by ASP and a SMS is sent to the customer notifying the customer of the response call that was made.

If no call was received and system falsely updated the customer can reply back with "OVOT NO" on 56563.

- ✓ **Checkpoint 4:** After the service request is completed a verification SMS is sent.

If the customer is not satisfied/happy or the call is not completed but falsely updated the customer can reply back "OVOT NO" on 56563.



India and Industry's
1st Service Process

which updates you and verifies at each milestone.



Save the Earth.



Save the Future.

- Please don't dispose any Amstrad products, these can be recycled. Contact us on our website or dial a Toll free no. 1800 267 4777 and we will send someone to recycle your products.
- Amstrad uses only green refrigerant like R32 which has a Zero GWP (Global Warming Potential).
- All Amstrad PCB's use lead free soldering material and are ROHS compliant.
- Rooftop Solar Power Generation to achieve ZERO Carbon footprint 2025.
- Rainwater Harvesting and Sewage Treatment Plant.
- Planted over 500 trees at the factory campus as part of Green Initiatives "Save the Earth. Save the Future".



- Green Commitment - e catalogue
AMSTRAD believes in conserving the environment and saving the planet for the Next Generation. We need your support in our green endeavour by promoting e-catalogue to save the trees which are being cut every day.



Amstrad Consumer India Private Limited (formerly known as "OVOT Private Limited")

Gut No- 730, Milkat No 1660, Near Bholhai Mata Palace, Taluka Haveli, Wade Bholhai, Pune - 412207

Website: www.amstradworld.com | Email: care@amstradworld.com

Customer Care No.: 1860 266 77777 | IVR No.: 020 7197 0079 | WhatsApp Service Support: +91 9175950079

E-Waste Email: ewaste@amstradworld.com | E-Waste Toll Free No.: 1800 267 4777